

FOREST FRIENDS FRIENDS

52" X 76" QUILT — DESIGNED BY RACHEL SHELBURNE




FOREST FRIENDS FABRIC COLLECTION BY KRIS LAMMERS


MAYWOOD  STUDIO

Assembling the Panel Blocks

1. Sew a small Fabric 11 sashing to the top and bottom of a panel square. Press toward the sashing. Add the Fabric 11 large sashings to the sides of the block. Press toward the sashing. At this point the block should measure 9½" square. Repeat for the remaining 7 panel squares.

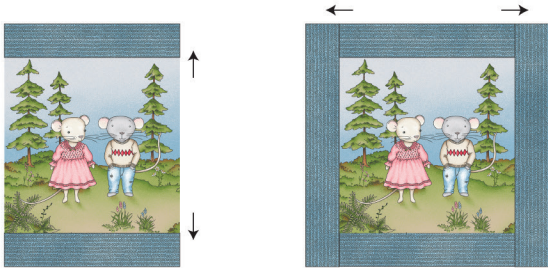


2. In the same manner, sew the small Fabric 12 sashings to the top and bottom of the Step 1 blocks. Press toward the sashing. Sew the large Fabric 12 sashings to the sides of the Step 1 block. Press toward the sashing. At this point the blocks should measure 12½" square.

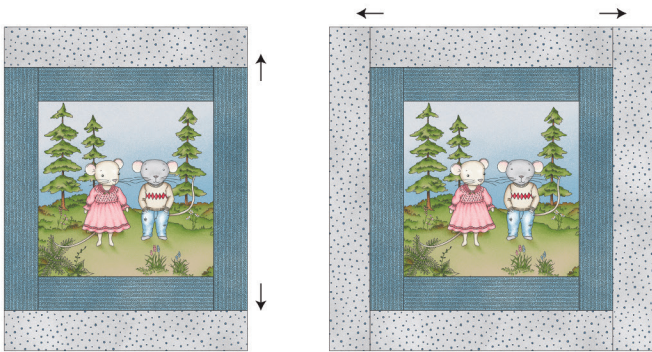


Assembling the Pinwheel Blocks


3. Match a Fabric 10 triangle with a Fabric 9 triangle. Sew on the diagonal edge. Press toward the Fabric 10 triangle and trim dog-ears to complete one triangle-square units. Make a total of 28 triangle-square units. At this point the units should measure 6½" square.



4. Sew the triangle-squares from Step 3 together in pairs as shown below. Press in the direction of the arrow. Make a total of 14 units.

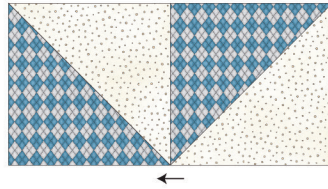


5. Sew the Step 4 units together as shown to make a pinwheel block, matching and pinning the centers. Press the center seam open. Make 7 pinwheel blocks. At this point the blocks should measure 12½" square.

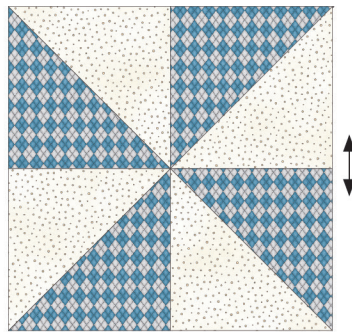


Assembling the Quilt

6. Sew two panel blocks and one pinwheel block together into a row as shown. Make a total of 3 rows. Press toward the panel blocks.

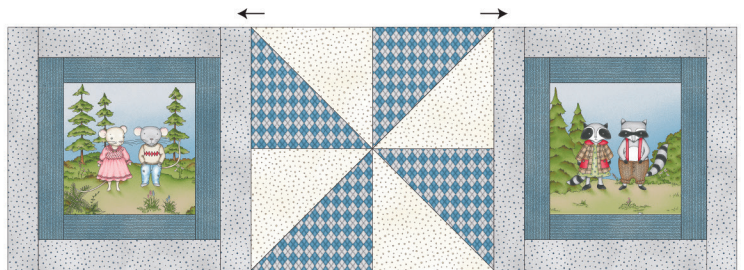


7. Sew two pinwheel blocks and one panel block together into a row as shown. Make a total of 2 rows. Press toward the panel block.

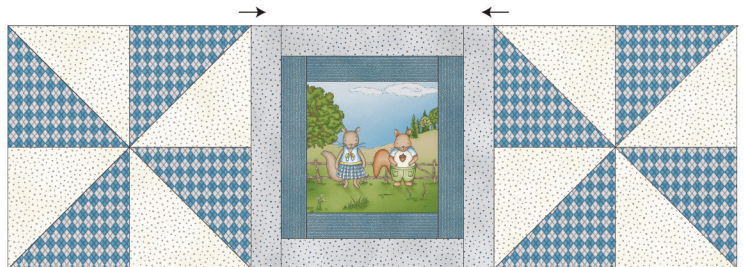


8. Beginning with a Step 6 row and alternating the Step 6 and Step 7 rows, sew the rows together to make the quilt top. Press seams down.

Assembling the Borders


9. Sew (on the marked line) a Fabric 9 square onto the right side of a Fabric 1 rectangle as shown, print sides together. Trim away the excess Fabric at the corner and press toward the Fabric 9 triangle. Using the Fabric 1-7 rectangles, make a total of 56 units.

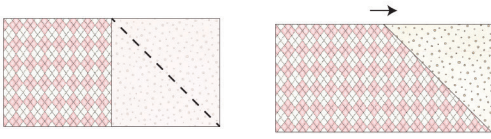


10. In the same manner, sew a Fabric 9 square to the left side of the Step 9 unit. Trim and press toward Fabric 9. Make a total of 56 flying geese units. At this point the units should measure 4½" x 8½".

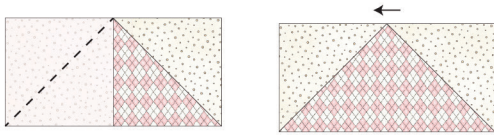

11. Sew 15 flying geese units together to make a side border. Press toward the base of the triangles. Repeat to make a second side border. Sew the side borders to the quilt, matching and pinning seam intersections. Press toward the quilt center.

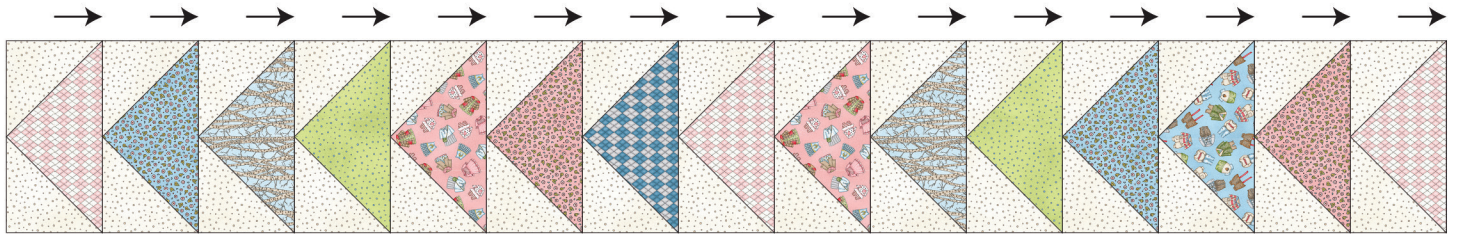

12. Sew 13 flying geese units together to make the top border. Repeat to make the bottom border. Press toward the base of the triangles. Sew to the top and bottom of the quilt, matching and pinning seam intersections. Press toward the quilt center.


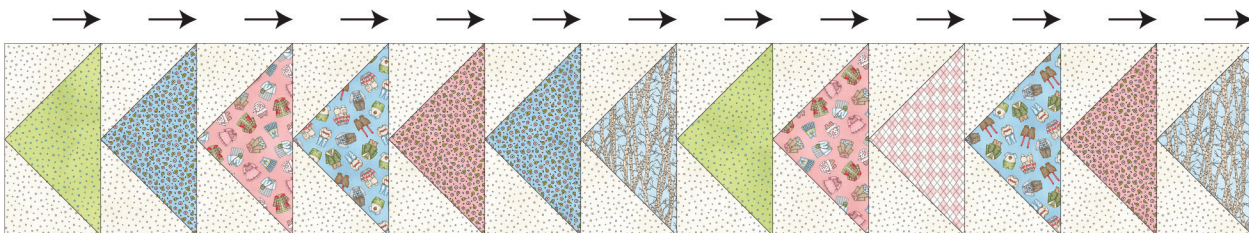









Finishing the Quilt


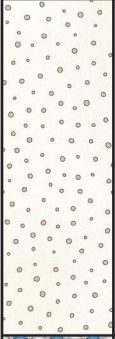


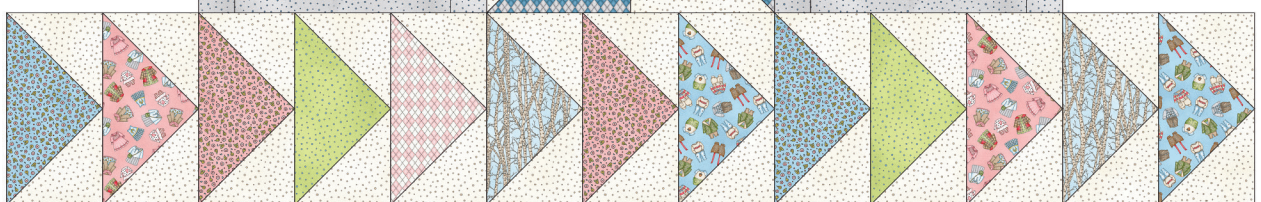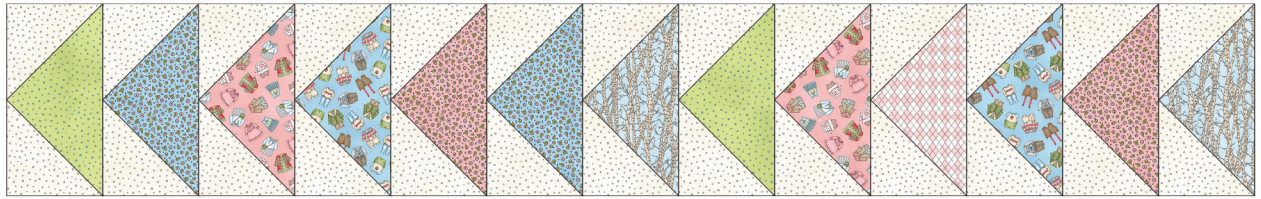

13. Trim the batting and backing to 2" larger on all sides than the quilt top. Layer, baste and quilt as desired.

14. Before binding, hand-baste a scant ¼" from the edge of the quilt to prevent the layers from shifting or stretching as the binding is sewn on.

15. Join the Fabric 12 binding strips with diagonal seams pressed open. Fold the binding in half, wrong sides together and press to make a double binding. Sew to the quilt with a ¼" seam allowance, mitering the corners. Trim the excess batting and backing, turn to the back side and stitch down by hand with matching thread.



FABRIC		CUTTING
	Fabric 1 8190-PE 1/3 yd	From Fabrics 1-7, cut: 2 — 4 1/2" x WOF strips, into: 8 — 4 1/2" x 8 1/2" rectangles
	Fabric 2 8185-P 1/3 yd	
	Fabric 3 8186-B 1/3 yd	
	Fabric 4 8187-P 1/3 yd	
	Fabric 5 8187-B 1/3 yd	
	Fabric 6 8189-G 1/3 yd	
	Fabric 7 8191-B 1/3 yd	

FABRIC		CUTTING
	Fabric 8 8181-K 2 panel rows (16" x WOF)	From Fabric 8, cut: fussy-cut 8 blocks measuring 7" square
	Fabric 9 8189-E 2 1/2 yds	From Fabric 9, cut: 3 — 6 7/8" WOF strips, into: 14 — 6 7/8" squares cut once on the diagonal 14 — 4 1/2" WOF strips, into: 112 — 4 1/2" squares <i>marked</i> on the diagonal
	Fabric 10 8190-BK 3/4 yd	From Fabric 10, cut: 3 — 6 7/8" WOF strips, into: 14 — 6 7/8" squares cut once on the diagonal
	Fabric 11 8188-B 1/2 yd	From Fabric 11, cut: 8 — 1 3/4" WOF strips, into: 16 — 1 3/4" x 7" sashings 16 — 1 3/4" x 9 1/2" sashings
	Fabric 12 8189-K 1 1/8 yds	From Fabric 12, cut: 10 — 2" WOF strips, into: 16 — 2" x 9 1/2" sashings 16 — 2" x 12 1/2" sashings 7 — 2 1/2" x WOF strips for binding
	Backing YOUR CHOICE 3/4 yd	Cut the Fabric in half crosswise (selvage to selvage), remove the selvages, and then sew the 2 pieces together lengthwise (along the long edges).

